

HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO., LIMITED www.ledlight-components.com

Features:

- 1. 0.39"(inch) digit height.
- 2. Excellent segment uniformity.
- 3. Sold state reliability.
- 4. Industrial standard size.
- 5. Low power consumption.
- 6. The product itself will remain within RoHS compliant Version.

Descriptions:

- 1. The DL2-391XRB series is a lager 10.0mm(0.39") high seven segments display designed for viewing distances up to 7 meters.
- 2. These displays provide excellent reliability in bright ambient light.
- 3. These devices are made with white segments and black surface.

Applications:


- 1. Audio equipment.
- 2. Instrument panels.
- 3. Digital read out display.

Device Selection Guide:


| Model No. | Chip Material | Source Color | Description | |
|------------|---------------|------------------|----------------|--|
| DL2-391ARB | C-AlA- | Super Bright Red | Common Anode | |
| DL2-391CRB | GaAlAs | Super Bright Red | Common Cathode | |

Spec No: DL2-391XRB Rev No: V.2 Date: Sep/21/2010 Page: 2 OF 6


Package Dimension:

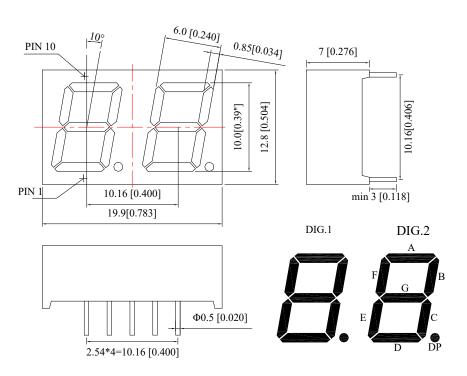

DL2-391ARB



DL2-391CRB



Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(.010")mm unless otherwise noted.
- 3. Specifications are subject to change without notice.

Spec No: DL2-391XRB Rev No: V.2 Date: Sep/21/2010 Page:3 OF 6

Absolute Maximum Ratings at Ta=25℃

| Parameters | Symbol | Max. | Unit | |
|---|--------|--------------------|------|--|
| Power Dissipation Per Segment | PD | 76 | mW | |
| Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width) | IFP | 100 | mA | |
| Forward Current Per Segment | IF | 25 | mA | |
| Dating Linear From 50℃ | | 0.4 | mA/℃ | |
| Reverse Voltage | VR | 5 | V | |
| Operating Temperature Range | Topr | -40°C to +80°C | | |
| Storage Temperature Range | Tstg | -40°C to +85°C | | |
| Soldering Temperature | Tsld | 260℃ for 5 Seconds | | |

Electrical Optical Characteristics at Ta=25℃

| Parameters | Symbol | Min. | Тур. | Max. | Unit | Test Condition |
|---|------------------|------|------|------|------|------------------|
| Luminous Intensity | lv | 12.0 | 24.0 | | mcd | IF=20mA (Note 1) |
| Luminous Intensity Matching Ratio (Segment To Segment) | I _{v-m} | | | 2:1 | | IF=10mA |
| Peak Emission Wavelength | λр | | 660 | | nm | IF=20mA |
| Dominant Wavelength | λd | | 640 | | nm | IF=20mA (Note 2) |
| Spectral Line Half-Width | Δλ | | 20 | | nm | IF=20mA |
| Forward Voltage | VF | | 1.8 | 2.4 | V | IF=20mA |


Notes:

- 1. Luminous Intensity Measurement allowance is ± 10%.
- 2. It use many parameters that correspond to the CIE 1931 2°. X, Y, and Z are CIE 1931 2° values of Red, Green and Blue content of the measurement.


Date: Sep/21/2010 Spec No: DL2-391XRB Rev No: V.2 Page:4 OF 6 HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED

◆ Typical Electrical / Optical Characteristics Curves


(25°C Ambient Temperature Unless Otherwise Noted)




Forward Current & Forward Voltage




Forward Current Derating Curve



Luminous Intensity & Ambient Temperature



Luminous Intensity & Forward Current



Please read the following notes before using the datasheets:

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30 $^{\circ}$ C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile.
 - 3.2 Reflow soldering should not be done more than two times.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260° C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Spec No: DL2-391XRB Rev No: V.2 Date: Sep/21/2010 Page:6 OF 6
HONGKONG DOUBLE LIGHT ELECTRONICS TECHNOLOGY CO.,LIMITED www.ledlight-components.com